

ALL YOU NEED TO KNOW ABOUT BOLTS

IDEAL BOLT MEASURING TOOLS

For precision measuring we would recommend the use of Digital Vernier Callipers and a Thread Gauge to measure thread pitch. For standard bolts in the range of M5 – M12 we offer our own Pro-bolt Measuring Gauge – see ourwebsite for details.

IMPORTANT

If you print out this pdf, make sure you print it at full size - do this by setting 'Page Scaling' to 'None' in the print option window

MEASURING A FASTENER

Shank Diameter


Also called Major diameter. The diameter of a bolt is the Shank diameter, expressed in millimetres for Metric bolts. Because this is approximately the same as the Major or Thread diameter the thread diameter measurement can be used for fully threaded bolts.


Shank Length


Fastener length is measured from where the material surface is assumed to be, to the end of the fastener. For fasteners where the head usually sits above the surface, the measurement is from directly under the head to the end of the fastener. For fasteners that are designed to be countersunk, the measurement is made from the point on the head where the surface of the material is, to the end of the fastener.


Thread Pitch

Metric fasteners are specified with a thread pitch instead of a thread count. The thread pitch is the distance between threads expressed in millimeters (measured along the length of the fastener). For example a thread pitch of 1.5 means that the distance between one thread and the next is 1.5mm. In general smaller fasteners have finer thread so they have lower thread pitch.

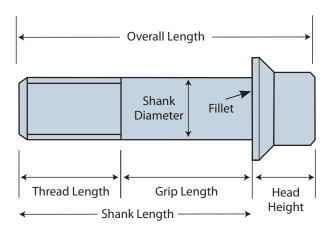











Note: Not all sizes are available in ALL materials, please refer to relevant material section.


Standard Allen Key Socket Cap Bolts -

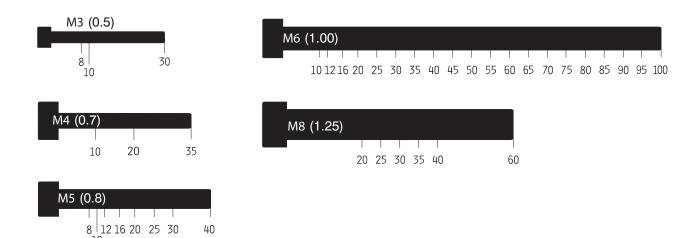


Tapered Socket Cap Bolts

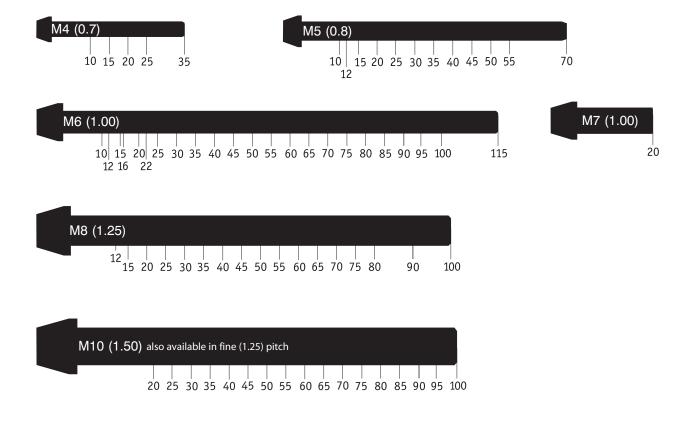




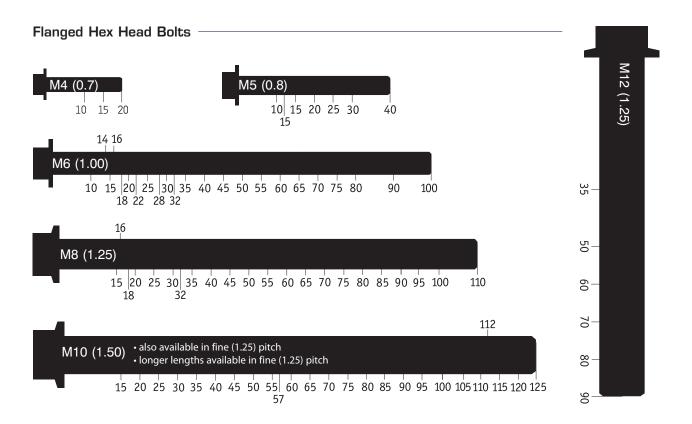



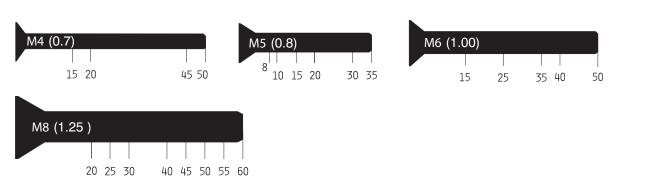


Dome Head/Fairing Bolts

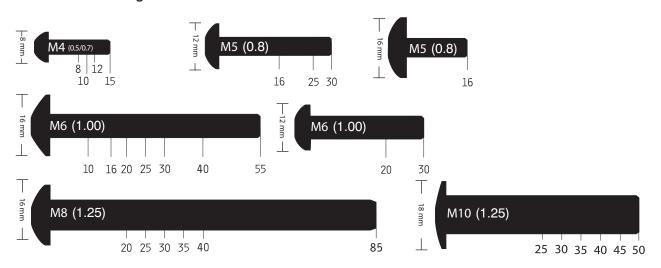



Note: Not all sizes are available in ALL materials, please refer to relevant material section.


Flat Washers -7 mm 18 mm — 20 mm — — ___ 25 mm ____ M8 M10 ____ 20 mm ____ ____ 20 mm ____ — 30 mm — M12 M14 M16 ____ 28 mm _____ 30 mm Drilled Washers -

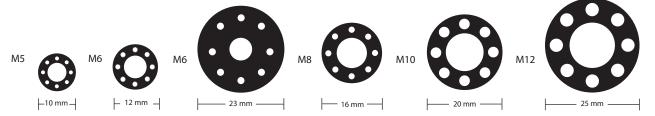


Countersunk Bodywork Washers —
















Race Spec Bolts -















Race Spec Bodywork Bolts



